



## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification 5 : B32B 1/04, 3/02	A1	(11) International Publication Number: WO 91/11321 (43) International Publication Date: 8 August 1991 (08.08.91)
---	----	---

(21) International Application Number: PCT/US90/06985

(22) International Filing Date: 30 November 1990 (30.11.90)

## (30) Priority data:

473,895	2 February 1990 (02.02.90)	US
573,544	27 August 1990 (27.08.90)	US


(71)(72) Applicant and Inventor: TEARE, John, W. [US/US]; 26 Hollytree Court, Hamilton, OH 45011 (US).

(81) Designated States: AT (European patent), AU, BE (European patent), BR, CH (European patent), DE (European patent), DK (European patent), ES (European patent), FI, FR (European patent), GB (European patent), GR (European patent), HU, IT (European patent), LU (European patent), NL (European patent), NO, RO, SE (European patent), SU.

Published

With international search report.

(54) Title: IMPROVED CEMENTITIOUS CONSTRUCTION PANEL

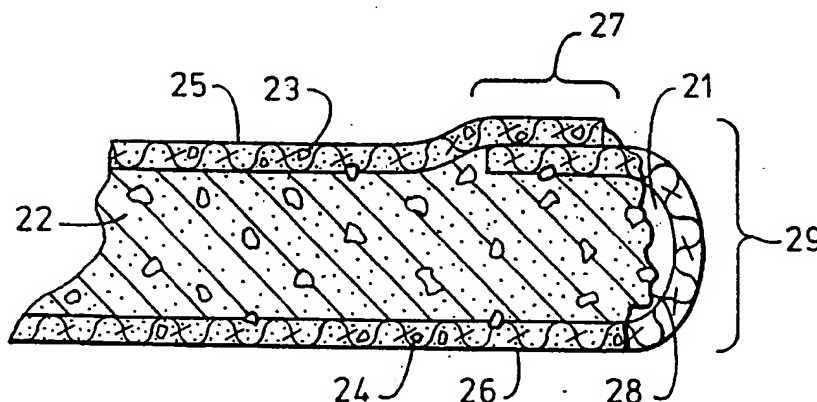

## (57) Abstract

The invention relates to a light-weight concrete construction panel having a layer of reinforcing mesh (23, 24) bonded to each of the two faces. Such panels are used on walls and floors as backboards for the installation of ceramic tile and other facing materials. In this invention the web of mesh or other fabric wraps around the edge (28) of the panel and is bonded in place on the top and bottom faces. The section of mesh (29) covering the edge is left unbonded and open.

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	ES	Spain	MG	Madagascar
AU	Australia	FI	Finland	ML	Mali
BB	Barbados	FR	France	MN	Mongolia
BE	Belgium	GA	Gabon	MR	Mauritania
BF	Burkina Faso	GB	United Kingdom	MW	Malawi
BG	Bulgaria	GN	Guinea	NL	Netherlands
BJ	Benin	GR	Greece	NO	Norway
BR	Brazil	HU	Hungary	PL	Poland
CA	Canada	IT	Italy	RO	Romania
CF	Central African Republic	JP	Japan	SD	Sudan
CG	Congo	KP	Democratic People's Republic of Korea	SE	Sweden
CH	Switzerland	KR	Republic of Korea	SN	Senegal
CI	Côte d'Ivoire	LI	Liechtenstein	SU	Soviet Union
CM	Cameroon	LK	Sri Lanka	TD	Chad
CS	Czechoslovakia	LU	Luxembourg	TC	Togo
DE	Germany	MC	Monaco	US	United States of America
DK	Denmark				

-1-

## IMPROVED CEMENTITIOUS CONSTRUCTION PANEL

This application is a continuation-in-part of my copend-  
5 ing patent application, Ser. No. 473,895, filed February 2,  
1990.

This invention relates to an improved reinforced cemen-  
titious construction panel such as gypsum wallboard, light-  
weight concrete panels, fabric reinforced tile backerboards,  
10 and the like. In general, such cementitious panels are fas-  
tened to the framing of a building and serve as a backer-  
board for the installation of a facing material, for example,  
ceramic tile, thin brick, thin marble panels and stucco.  
However they also are used without a facing material as with  
15 the application of a paint.

More particularly this invention relates to a cementiti-  
ous backerboard comprising a panel having a core layer of  
light-weight concrete with each of the two faces being cov-  
ered with a layer of reinforcing fabric bonded to the core  
20 layer. Such cementitious backerboards are described in U.S.  
Patent No. 3,284,980 (1966), P. E. Dinkel. These panels are  
nailable and are readily fastened to the framing members.  
Furthermore they are substantially unaffected by water and  
consequently find extensive use in wet areas such as shower  
25 enclosures, bathtub surrounds, kitchen areas and entryways,  
as well as on building exteriors.

Cementitious backerboards are generally produced using a  
core mix of water, light-weight aggregate (e.g., expanded  
clay, expanded slag, expanded shale, perlite, expanded glass  
30 beads, polystyrene beads, and the like), and a cementitious  
material (e.g., portland cement, magnesia cement, alumina  
cement, gypsum and blends of such materials). A foaming  
agent as well as other additives can be added to the mix.

The reinforcing fabric most generally employed is a fi-  
35 ber glass scrim, in particular, a woven mesh of vinyl coat-  
ed fiber glass yarns. The yarn count per inch of the fabric  
varies from 8 x 8 to 12 x 12, depending upon the size of the

SUBSTITUTE SHEET

-2-

openings in the mesh or scrim for the passage of the bonding material through the fabric. Other pervious fabrics having suitable tensile strength, alkali resistance and sufficiently large pores or openings may be employed.

5       Very commonly the reinforcing fabric is bonded to the surface of the core layer with a thin coating of portland cement slurry, with or without some fine aggregate added. Alternatively the core mix can be sufficiently fluid to be vibrated or forced through the openings of the reinforcing  
10 fabric to cover the fabric and to bond it to the core layer. This is described in U. S. Patent No. 4,450,022 (Galer).

      In the installation of cementitious backerboards, as for example in the construction of a wall section, it is standard practice to leave a small space (e.g., 1/8") between  
15 two panels where the two abut, which then must be filled with mortar or the like and tape applied over this joint. This filling and taping of the joints between the panels is carried out in order to bridge across the gap between the panels and thereby provide a continuous surface on which to  
20 install the ceramic tile or other facing material. Such filling and taping is specified in the "Wonder-Board" brochure published by Modulars, Inc., and in the "Durock" brochure published by the Durabond Division of U.S.G. Industries, Inc.

      Also, the filling and taping of joints between panels is  
25 specified by the backerboard manufactures for the intended purpose of securing edge-to-edge bonding of the panels. This is to obtain a stronger integral wall structure and thereby reduce wall surface movement and avoid cracking of the ceramic tile or the like.

30       However, edge-to-edge bonding can be achieved only in part due to the manner in which the backerboards are conventionally installed. This is illustrated in Fig.1. Wall section 1 consists of framing members 2 (wood or steel studs) floor plate 3, top plate 4, and backerboard panels 5 attached  
35 to the studs with nails or screws 6. The backerboard panels 5 conventionally are installed in the horizontal position in order to catch the stud spacing, normally 16"o.c. A gap 7

-3-

of about 1/8", is left between the longitudinal edges of the panels. A problem arises when the effort is made to fill the longitudinal joint, that is gap 7, with mortar. Since there is only empty space in back of the gap 7, except at the studs, the mortar tends to fall through and cannot be packed, leaving voids in the joint. A gap 8 also is left between ends of the panels but since the abutting ends 9 are secured to a stud, the end joints are provided with a backing and can be filled solid. All joints must then be covered, according to the manufacturer's specifications, with a tape 10, normally 2" wide.

Another problem area with the present type of backer-board panels is the taping step. Not only is this an extra step in the installation of ceramic tile or other facing material, but the tape is also an obstruction in the tile setting operation. Since the tape is applied over the surface of the backerboard at the joints it leaves a raised band or strip which tends to catch the tile setter's notched trowel as the installer is spreading the tile setting mortar, slowing the work and, in some cases, tearing away the tape. In addition each strip of tape presents a raised area on an otherwise flat surface. Since the tile setter is required to set the tile in a smooth plane, in particular on a flat wall, the tile setting mortar must be applied in a heavier layer in the tape-free areas in order to compensate for the raised areas of the taped joints.

Consequently the elimination of the need for taping the joints between the panels would materially simplify the installation of facing materials thereby increasing the productivity of the installer. Also a better installation is made possible, the facing material being set in a truer plane.

## PRIOR ART

U. S. Patent No. 3,284,980 (1966), P. E. Dinkel, discloses a fabric reinforced tile backerboard and illustrates the taping of the joints between backerboard panels.

U. S. Patent No. 4,203,788 (1980) T. E. Clear, discloses

SUBSTITUTE SHEET

-4-

a method and apparatus for producing fabric reinforced tile backerboard panels.

U. S. Patent No. 4,450,022 (1984), R. E. Galer et al describes a modified type of cementitious backerboard in which the same cementitious composition is used both as the core and the bonding material for the reinforcing fabric.

U. S. Patent No. 4,488,909 (1984) R. E. Galer et al describes in further detail, in column 4, the cementitious composition used in a cementitious backerboard.

U. S. Patent No. 4,518,652 (1985) M. D. Willoughby describes formation of a cementitious construction panel based upon gypsum.

U. S. Patent No. 4,504,335 (1985) R. E. Galer, discloses a modified method for producing fabric reinforced cementitious backerboards.

U. S. Patent No. 4,916,004 (1990) R. P. Ensminger et al describes a reinforced cementitious panel in which the reinforcement wraps the edges but is embedded in the core mix.

## BRIEF DESCRIPTION OF THE INVENTION

An object of my invention is to provide an improved means of edge bonding cementitious construction panels.

A second object of my invention is to provide cementitious construction panels having greater potential edge-to-edge bonding strength.

A further object of my invention is to eliminate the need for taping the joints between abutting backerboard panels in the installation of ceramic tile or other facing materials.

My invention comprises a fabric reinforced construction panel in which the fabric on at least one of the faces of the panel is wrapped around at least one of the longitudinal edges of the panel and bonded in place on the top and bottom faces of the panel, the edge portion of the fabric being free of material and being open and pervious to receive the joint filling material.

-5-

In the preferred embodiment, the panel of my invention comprises a core layer of a mix of portland cement and a light-weight aggregate with a layer of fiber glass mesh scrim covering and bonded to the top face and the bottom face of the core layer, the scrim also wrapping the two longitudinal edges of the core layer, the portion of the scrim wrapping each of the edges being substantially unbonded and being open and pervious to receive the mortar or other joint filling material.

## DESCRIPTION OF THE DRAWINGS

My invention is more fully described with reference to the drawings, in which:

Fig. 1 is a view in front elevation of a typical wall erected with cementitious construction panels.

Fig. 2 is a perspective view of an end portion of a cementitious construction panel of the prior art.

Fig. 3 is a perspective view of an end portion of a second prior art cementitious construction panel.

Fig. 4 is a partial cross-sectional view of the cementitious construction panel of my invention.

Fig. 5 is a partial cross-sectional view of two of the panels of my invention in abutting position before the mortar is applied to form a panel joint.

Fig. 6 is the same view as in Fig. 5 showing the mortar in place in the joint.

Fig. 7 is a cross-sectional view of one of the panels of my invention forming a corner joint with another panel.

The typical wall construction shown in Fig. 1 has been described previously in the specification.

Fig. 2 shows a cross-section of a prior art backerboard 11. Such panels normally are 1/2" thick, three feet wide and 4 to 8 feet long. A core of expanded shale and portland cement is covered on each of its two faces with a layer of fiber glass mesh 13 bonded to the core face with a thin layer 14 of neat portland cement. The edges 15 and ends 16 are bare with the core 12 exposed.

-6-

Fig. 3 shows a cross-section of a second prior art back-board 17. The core 18 is composed of a foamed portland cement matrix with expanded polystyrene beads and other light-weight aggregate. The core is enclosed by a layer of fiber glass scrim 19, top, bottom and edges, the scrim being embedded in the core composition and bonded to the core layer. None of the scrim is exposed. The one cementitious composition constitutes the core 18 and the surface bonding layer 20.

My invention is shown in Fig. 4, in cross-sectional view; the dimensions are exaggerated in order to more clearly illustrate its structure. The core layer 22 is a light-weight aggregate-portland cement composition. It is covered with a layer of reinforcing fabric, preferably a woven mesh of vinyl coated fiber glass yarns, 23 on top and 24 on the bottom, each bonded to the core with a coating of a cementitious material, 25 on the top and 26 on the bottom. Typically the usual bonding layer is a coating of neat portland cement. In the forming operation the bottom fabric layer 24, of a suitable width, is folded around the edge 28 and a narrow section 27 thereof folded over on to the top of the core along the length of the panel. In a prior step the coating of neat portland cement is applied to that portion of the fabric web 24 which is brought into contact with the bottom of the core. The second layer of fabric 23 is laid down on the top of the core and extends over the portion 27 of the bottom fabric layer; a coating of the cement is applied over the fabric 23 as indicated at 25 to bond it to the core layer 22. The folded over section 27 becomes embedded in the portland cement and becomes united with the web 23. One or both edges of the panel can be wrapped with the bottom layer 24. The fabric actually is much thinner than is shown in Fig. 4, and in the finished product the top surface is substantially flat as shown in Figs. 5 and 6.

Alternatively the bottom web of fabric 24 can be of sufficient width that it can be folded, not only around the



-7-

edges of the panel, but also over on to the top of the core so that the edges of this web 24 are brought together in abutting or over-lapping arrangement, eliminating the top layer 23.

5 The key element is the section 29 of the fabric layer 24. Preferably, section 29 is clear of cementitious or other material. However, in my invention it is only required that section 29 of the fabric be sufficiently open as to permit  
10 penetration of the fabric by the mortar or mastic employed to fill the joint between abutting panels to form an edge-to-edge bond. Thus, while some of the coating of cementitious material applied as a slurry may extend over some of the openings in the pervious fabric along section 29, normally  
15 this will not interfere with adequate penetration of the fabric by the mortar or the like for the formation of a good bond with the mesh of the opposing panel.

The fabric web is not necessarily taut around the edge 28; this section 29 preferably is sufficiently slack to allow space behind the fabric at 21 to permit mortar of other  
20 material used to fill the joint to come into contact with the core material.

Figs. 5 and 6 illustrate the formation of an edge-to-edge bond between two fabric reinforced backerboards; in this example glass fiber mesh fabric is employed. A small  
25 gap (e.g., 1/8" approx.) is left in the joint 30 between the two panels, A and B. The tile installer fills the joint either before or at the time of the tile setting, by pressing mortar or other tile installing material into the gap. Fig. 5 shows the condition of the joint before the mortar is  
30 applied, while Fig. 6 shows the joint in the filled condition. The mortar 31 enters the openings in the mesh at sections 29a and 29b on the two edges, penetrating into bonding contact with the edges of the two panels, the mesh becoming embedded in the mortar. The joint can be packed solid quite  
35 readily due to the retaining action of the mesh.

-8-

As shown in Fig. 7, a joint can be formed to advantage where only the edge of one panel is provided with the open mesh section 29. Such a situation occurs where two panels form a corner. The open portion of the mesh receives the  
5 mortar 31a and holds it in place to fill the joint.

In a representative manufacturing operation for my panel, a continuous web of polyethylene coated paper is laid down on a moving conveyor belt as the carrier sheet, a continuous web of reinforcing fabric is deposited on the paper  
10 web, a portland cement slurry is wiped onto the web of fabric to coat it except on the edge portions that are to be turned up, core composition is deposited on the slurry coated bottom web, the core is shaped to the desired thickness and width of the panel being produced, the edge portions of  
15 the fabric web are turned up and folded over the edges with a suitable band of the fabric over-lapping onto the top of the core layer along each edge, a continuous web of reinforcing fabric is laid on top of the core extending sufficiently wide to cover the folded over portions of the lower web,  
20 and portland cement slurry is applied to coat the top layer of fabric and to bond it to the core and the folded over portions of the bottom web. The thus produced elongated panel-web is cut into panel lengths and cured, or the panel-web is cured and then cut into panels.

25 Specimens of cementitious backerboard were edge bonded and tested for tensile strength. The test results, presented in TABLE I, show that the strength of the joint formed by edge bonding with the panels of my invention, with no taping, is equal to or superior to that of the joints formed using  
30 the filling and taping method of the prior art.

-9-

TABLE I

## Comparison of Edge-to-Edge Bond Strength

5 Tensile Strength Tests Performed in Accordance  
With ASTM D-1037 (Modified)

10	1. Joints of "Wonder-Board" Tile Backerboard, Identified as "W-B", Prepared According to Instructions of Modulars, Inc.			
	2. Joints of Wrapped-Edge Backerboard of the Claimed Invention, Identified as "WEB"			
	<u>Type of Board</u>	<u>Tape - 2" Fiber Glass</u>	<u>Mortar Type</u>	<u>Tensile Strength lbs./sq. in.</u>
15	"W-B"	None applied	Thin Set	140
	"W-B"	Taped	Thin Set	150
	"W-B"	Taped	Thin Set plus latex	182
20	WEB	None applied	Thin Set	181
	WEB	None applied	Thin Set plus latex	191

## Notes:

25 Test results are the average of at least three tests.  
Mortar used was "Tile Mate" Premium Dual Purpose thin set mortar, sold by Bostik Construction Products, Co.

30 The "Wonder-Board" tile backerboard (aka glass mesh mortar units) used was produced by Fin-Pan, Inc., and marketed by Modulars, Inc.

The 2" fiber glass tape used is marketed by Modulars, Inc.

It is thus apparent from the test data that, with my  
35 novel improved backerboard, the need for taping joints is

SUBSTITUTE SHEET

-10-

obviated. With the open-mesh wrapped-edge, the mortar is retained when pressed into the joint, whereas in the prior art type of backerboard the mortar pressed into the joint more often than not falls out on the back, leaving incomplete bonding. A superior edge-to-edge bond is made possible because the mortar is not only brought into bonding contact with edge of the core, but the mortar joint also is reinforced with the mesh that is present. This novel wrapped-edge backerboard simplifies the work of the tile mechanic and, at the same time, a structurally stronger wall or other structure can be achieved with actual edge-to-edge bonding.

15

20

25

30

35

SUBSTITUTE SHEET

-11-

## WHAT I CLAIM IS:

1. A fabric reinforced cementitious construction panel  
5 comprising a cementitious core layer and a layer of pervious reinforcing fabric covering each of the two faces of said core layer, said fabric also wrapping at least one of the two longitudinal edges of said panel, said fabric being bonded to each of said two core faces and being unbonded  
10 along said wrapped longitudinal edge of said panel.
2. A fabric reinforced cementitious panel consisting of a core layer comprising light-weight aggregate and cementitious material, and a layer of pervious reinforcing fabric bonded to each of the two faces of said core layer with cementitious material, at least one of the longitudinal edges  
15 of said panel being wrapped with said reinforcing fabric, said reinforcing fabric being open and substantially free of said cementitious material along said panel edge.
3. A fabric reinforced cementitious panel consisting of a core layer comprising light-weight aggregate and cementitious material and a layer of pervious reinforcing fabric  
20 covering each of the two faces of said core layer, said fabric also wrapping at least one of the two longitudinal edges of said core layer, said fabric being bonded to each of said two faces of said panel with cementitious material, said  
25 fabric being open and unbonded along said wrapped longitudinal edge of said panel.
4. A panel as claimed in claim 1 in which said fabric is bonded to said core faces with a cementitious material.
- 30 5. A panel as claimed in claim 3 in which said cementitious material comprises portland cement.
6. A panel as claimed in claim 3 in which said reinforcing fabric is a fiber glass scrim.
7. A panel as claimed in claim 3 in which said reinforcing  
35 fabric is a woven mesh of vinyl resin-coated fiber glass yarns.

-12-

8. A fabric reinforced cementitious panel consisting of a core layer comprising a portland cement material and a light-weight aggregate and a layer of pervious fiber glass scrim bonded to each of the two faces of said core layer with said cementitious material, at least one of the longitudinal edges of said panel being wrapped with said scrim, said scrim being sufficiently open along said panel edge as to permit penetration of joint filling material.

9. A panel as claimed in claim 8 in which said layer of scrim along said panel edge is somewhat slack to provide space between said layer of scrim and said longitudinal panel edge.

10. A fabric reinforced cementitious construction panel comprising a cementitious core layer and a web of pervious reinforcing fabric covering the lower face of said core layer, said fabric also wrapping the two longitudinal edges of said panel and covering at least a portion of the top face of said core layer, said fabric being bonded to said faces of said core layer, said fabric being sufficiently open along said panel edges to permit penetration of joint filling material.

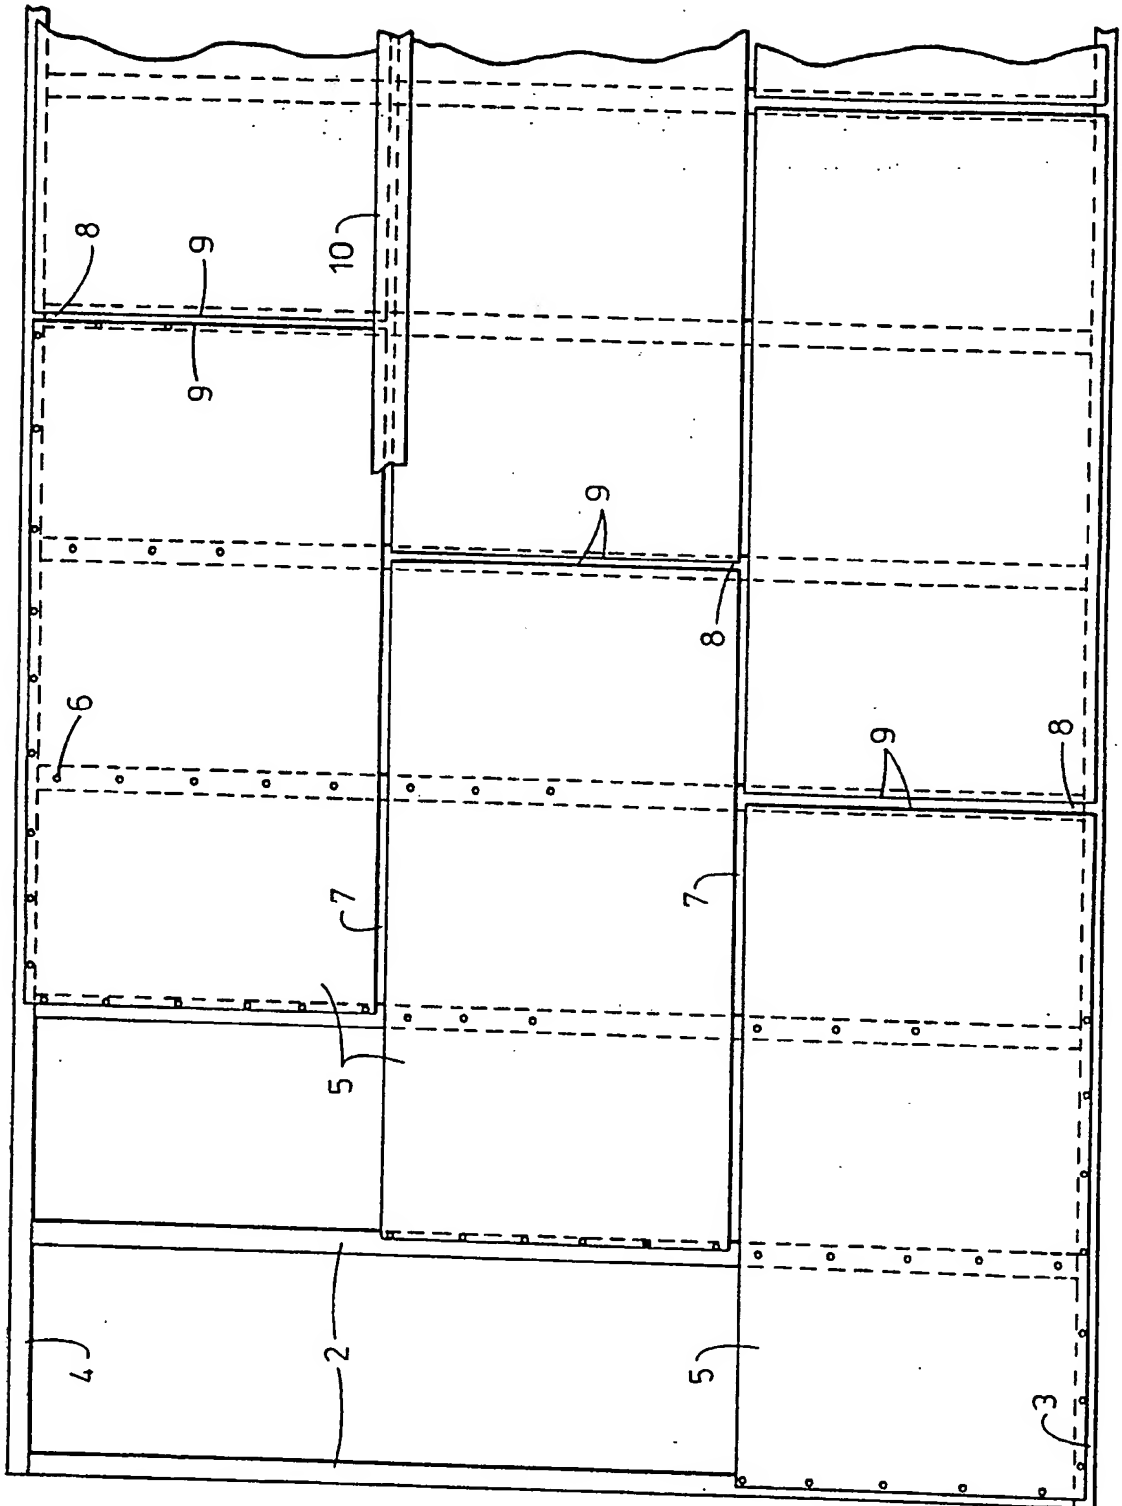


FIG. 1

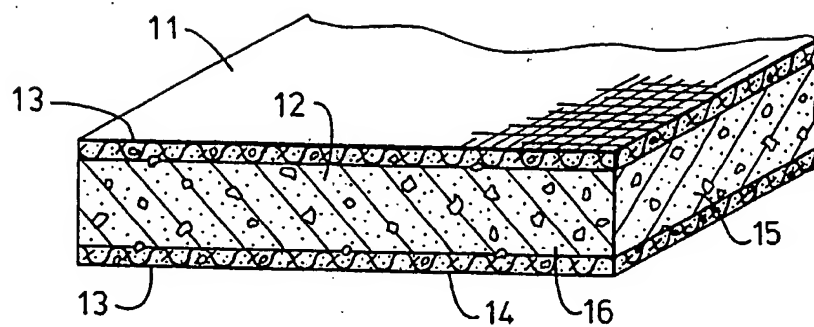


FIG. 2  
PRIOR ART

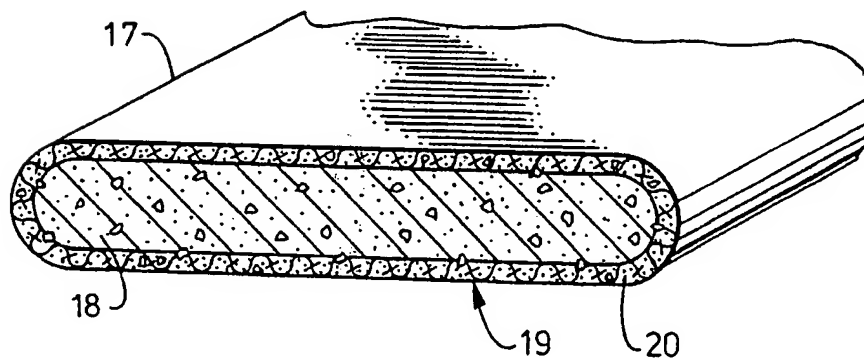


FIG. 3  
PRIOR ART

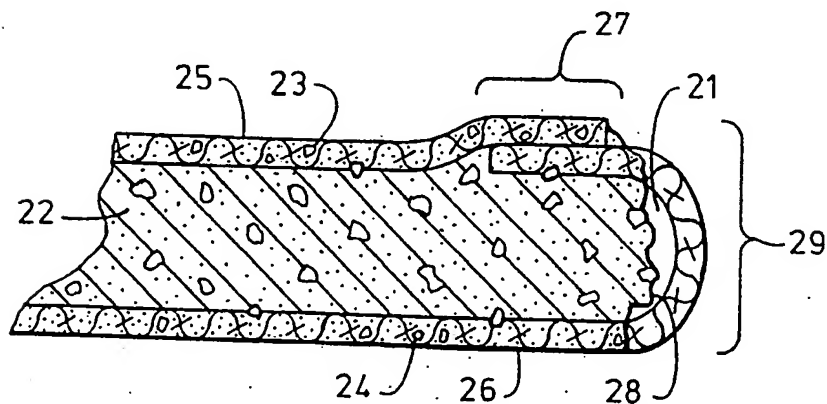


FIG. 4



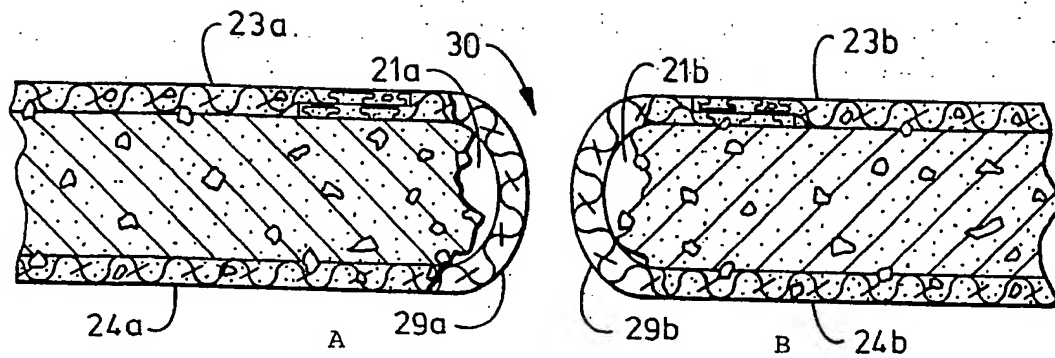


FIG. 5

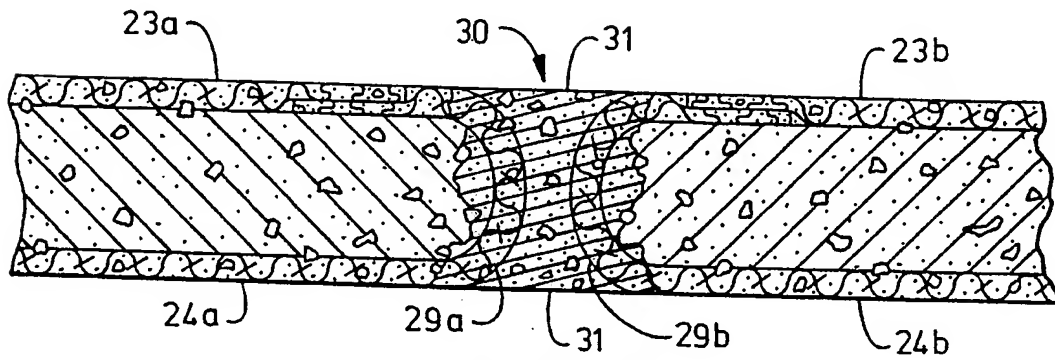


FIG. 6

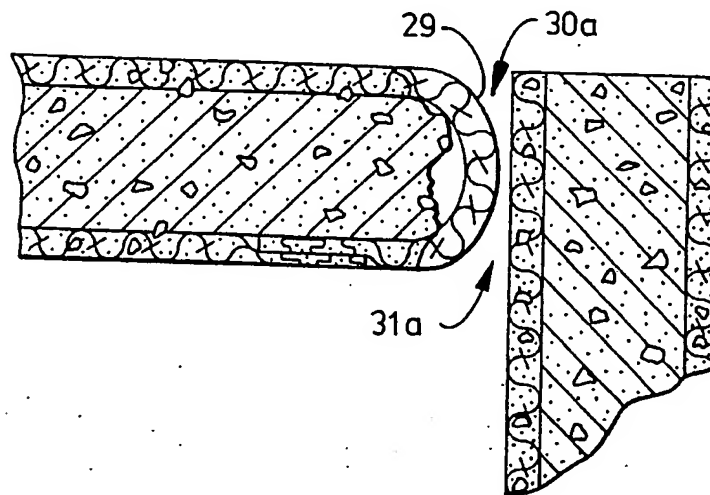


FIG. 7

# INTERNATIONAL SEARCH REPORT

International Application No.

PCT/US90/06985

<b>I. CLASSIFICATION C. SUBJECT MATTER</b> (if several classification symbols apply, indicate all) <sup>6</sup> According to International Patent Classification (IPC) or to both National Classification and IPC INT. CL. (5): B32B 1/04, 3/02 U.S. CL. 428/58, 70, 126, 246								
<b>II. FIELDS SEARCHED</b> <div style="text-align: center; border-top: 1px solid black; border-bottom: 1px solid black; margin: 5px 0;">Minimum Documentation Searched <sup>7</sup></div> <table style="width: 100%; border-collapse: collapse;"> <tr> <th style="width: 20%; border: 1px solid black; text-align: left;">Classification System</th> <th style="border: 1px solid black; text-align: left;">Classification Symbols</th> </tr> <tr> <td style="border: 1px solid black; padding: 5px;">U.S.</td> <td style="border: 1px solid black; padding: 5px;">428/57, 58, 68, 70, 124, 126, 246, 312.4, 703</td> </tr> </table> <div style="text-align: center; border-top: 1px solid black; border-bottom: 1px solid black; margin: 5px 0;">Documentation Searched other than Minimum Documentation to the extent that such Documents are included in the Fields Searched <sup>8</sup></div>			Classification System	Classification Symbols	U.S.	428/57, 58, 68, 70, 124, 126, 246, 312.4, 703		
Classification System	Classification Symbols							
U.S.	428/57, 58, 68, 70, 124, 126, 246, 312.4, 703							
<b>III. DOCUMENTS CONSIDERED TO BE RELEVANT <sup>9</sup></b> <table style="width: 100%; border-collapse: collapse;"> <tr> <th style="width: 10%; border: 1px solid black; text-align: left;">Category <sup>10</sup></th> <th style="border: 1px solid black; text-align: left;">Citation of Document, <sup>11</sup> with indication, where appropriate, of the relevant passages <sup>12</sup></th> <th style="width: 10%; border: 1px solid black; text-align: left;">Relevant to Claim No. <sup>13</sup></th> </tr> <tr> <td style="border: 1px solid black; vertical-align: top; padding: 5px;">A</td> <td style="border: 1px solid black; vertical-align: top; padding: 5px;">US, A, 4,351,867 (MULVEY) 28 SEPTEMBER 1982</td> <td style="border: 1px solid black; vertical-align: top; padding: 5px;">1-10</td> </tr> </table>			Category <sup>10</sup>	Citation of Document, <sup>11</sup> with indication, where appropriate, of the relevant passages <sup>12</sup>	Relevant to Claim No. <sup>13</sup>	A	US, A, 4,351,867 (MULVEY) 28 SEPTEMBER 1982	1-10
Category <sup>10</sup>	Citation of Document, <sup>11</sup> with indication, where appropriate, of the relevant passages <sup>12</sup>	Relevant to Claim No. <sup>13</sup>						
A	US, A, 4,351,867 (MULVEY) 28 SEPTEMBER 1982	1-10						
<div style="display: flex; justify-content: space-between;"> <div style="width: 45%;"> <p><sup>10</sup> Special categories of cited documents:</p> <p>"A" document defining the general state of the art which is not considered to be of particular relevance</p> <p>"E" earlier document but published on or after the international filing date</p> <p>"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)</p> <p>"O" document referring to an oral disclosure, use, exhibition or other means</p> <p>"P" document published prior to the international filing date but later than the priority date claimed</p> </div> <div style="width: 45%;"> <p>"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention</p> <p>"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step</p> <p>"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.</p> <p>"d" document member of the same patent family</p> </div> </div>								
<b>IV. CERTIFICATION</b> <table style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 50%; border: 1px solid black; padding: 5px;">           Date of the Actual Completion of the International Search            22 January 1991         </td> <td style="width: 50%; border: 1px solid black; padding: 5px;">           Date of Mailing of this International Search Report  <div style="text-align: center; font-size: 1.2em;">07 MAR 1991</div> </td> </tr> <tr> <td style="border: 1px solid black; padding: 5px;">           International Searching Authority            ISA/US         </td> <td style="border: 1px solid black; padding: 5px;">           Signature of Authorized Officer  <div style="text-align: center;">              W.J. Van Balen           </div> </td> </tr> </table>			Date of the Actual Completion of the International Search 22 January 1991	Date of Mailing of this International Search Report <div style="text-align: center; font-size: 1.2em;">07 MAR 1991</div>	International Searching Authority ISA/US	Signature of Authorized Officer <div style="text-align: center;">              W.J. Van Balen           </div>		
Date of the Actual Completion of the International Search 22 January 1991	Date of Mailing of this International Search Report <div style="text-align: center; font-size: 1.2em;">07 MAR 1991</div>							
International Searching Authority ISA/US	Signature of Authorized Officer <div style="text-align: center;">              W.J. Van Balen           </div>							